


WARNING SEWER SNAKE

Any piece of equipment can be dangerous if not operated properly. **YOU** are responsible for the safe operation of this equipment. The operator must carefully read and follow any warnings, safety signs and instructions provided with or located on the equipment. Do not remove, defeat, deface or render inoperable any of the safety devices or warnings on this equipment. If any safety devices or warnings have been removed, defeated, defaced or rendered inoperable, **DO NOT USE THIS EQUIPMENT!!!**

 **WARNING:** This product can expose you to chemicals including naphthalene and chromium from petroleum products used on the cable which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov

**;;;WARNING!!! We DO NOT recommend loading snakes inside your vehicle!
The snakehead is sharp and may cut or tear your vehicles upholstery!
WE ARE NOT RESPONSIBLE FOR THIS DAMAGE!
Load at your own risk.**

Always wear leather gloves. Never grasp a rotating cable with a rag or cloth glove. They could become wrapped around cable and cause serious injury.

**Wear safety glasses and rubber soled, non-slip shoes.
Use of this safety equipment will help prevent serious injury.**

**Wear proper apparel.
No loose clothing or jewelry to get caught in moving parts.**

If the person receiving this handout will not be the user of the equipment, forward these instructions to the operator. **If** there is any doubt as to the operation or safety of the equipment. **DO NOT USE!!! CALL A TOOL SHED IMMEDIATELY!!!**
FAILURE TO FOLLOW THESE INSTRUCTIONS COULD RESULT IN INJURY OR DEATH

Operating Instructions for

General Spin-Drive

For 2" to 4" lines

Your Spin-Drive is designed to give you years of trouble-free, profitable service. However, no machine is better than its operator. We therefore suggest you read these instructions through carefully before using your tool on the job. This will enable you to operate the Spin-Drive more efficiently and more profitably. Failure to follow these instructions may cause personal injury to operator and damage to the equipment.

Safety Instructions

- Wear **safety glasses** when operating tool.
- Wear **leather gloves only**, not cloth gloves, when handling the cable. A cloth glove might get caught in the coils of the cable while it's rotating.
- Neutralize or remove corrosive drain cleaners from drain before starting. Exposure to these chemicals can cause injury to the operator and damage the cable.

Operating Instructions

1. Place Spin-Drive within two feet of drain opening.
2. Loosen thumbscrew on spout.
3. Pull cable from drum and insert into drain. Push cable into pipe until resistance is met.
4. Pull one more foot of cable out of the drum so that an arc is formed.
5. Tighten thumbscrew.
6. Use the turning handle to spin the drum clockwise. Guide cable into the drain with the other hand.

DO NOT FORCE THE CABLE.



Too much pressure can damage the cable. Let it cut through stoppage at its own pace.

7. When all slack is out of cable, loosen thumbscrew and repeat steps 4, 5, and 6 until drain is clear.

8. When job is complete, return cable to drum while spinning it in the same clockwise direction.

Hint: It is often helpful to run a stream of water to wash away debris in line.

Model 400

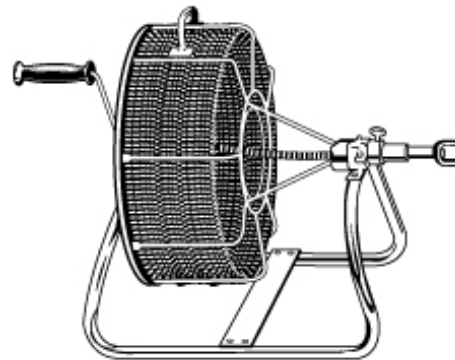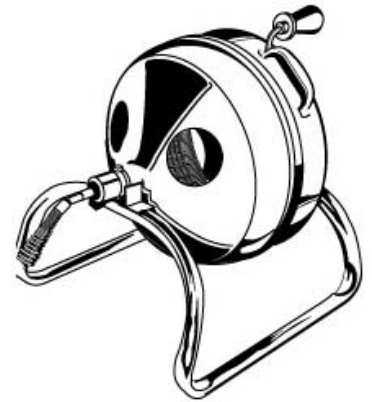

Model X500

Maintenance

To keep your tool operating smoothly, it is essential that all bearings and cables be lubricated. Oiling moving parts is particularly important where machine comes in contact with sand, grit and other abrasive material.

General Wire Spring Co.

1101 Thompson Avenue

McKees Rocks, PA 15136 USA

CR-400/X500-OI-0701